




DIRECT METERED DUAL FUEL 600 AMP SERVICE

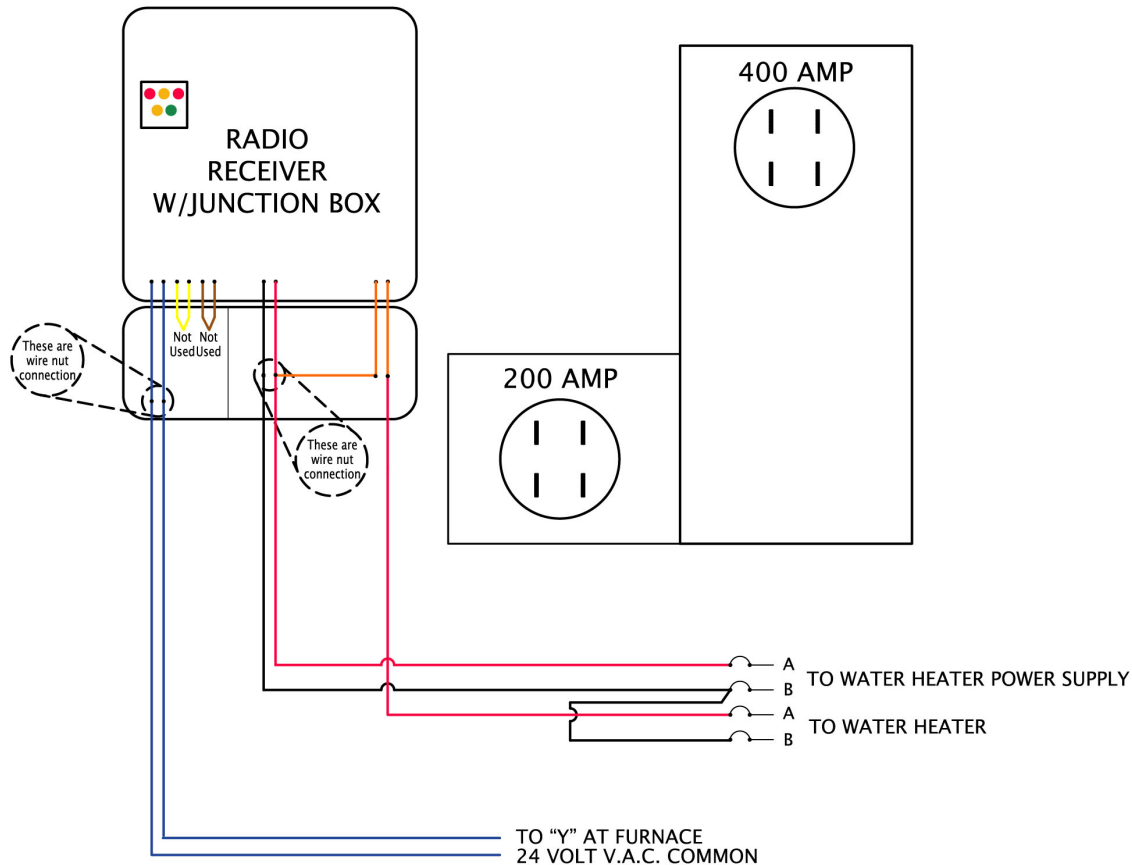

INSTRUCTIONS:

- Stearns Electric Association will not be responsible or liable for any personal injury or property damage in the wiring of or the operation of this or any Energy Wise system. Stearns Electric Association recommends the use of a licensed electrical contractor.
- All wiring must meet N.E.C. (National Electrical Code) and be inspected by a state electrical inspector before Stearns Electric Association will check out installation.
- Any time power is off & restored to the radio receiver, there will be a 15-minute time delay before unit will be allowed to operate.
- Radio receiver/meter socket should be mounted 4' to 6' above the ground outside of all structures with ample access around unit.
- This installation requires that a "PED" be set within 8' of the structure.
- The (A) phase of water heater power is wired in series with the orange wires of the radio receiver.
- The yellow and brown wires are not used in this installation.
- The "Y" circuit of the AC/ASHP is wired in series with the blue wires of the radio receiver.